


If carrying out large repaint work in a non controlled environment Do not apply paint if relative humidity is above 85% or temperature is within 3 deg C of Dew Point being the MPT or Minimum Paint Temperature.

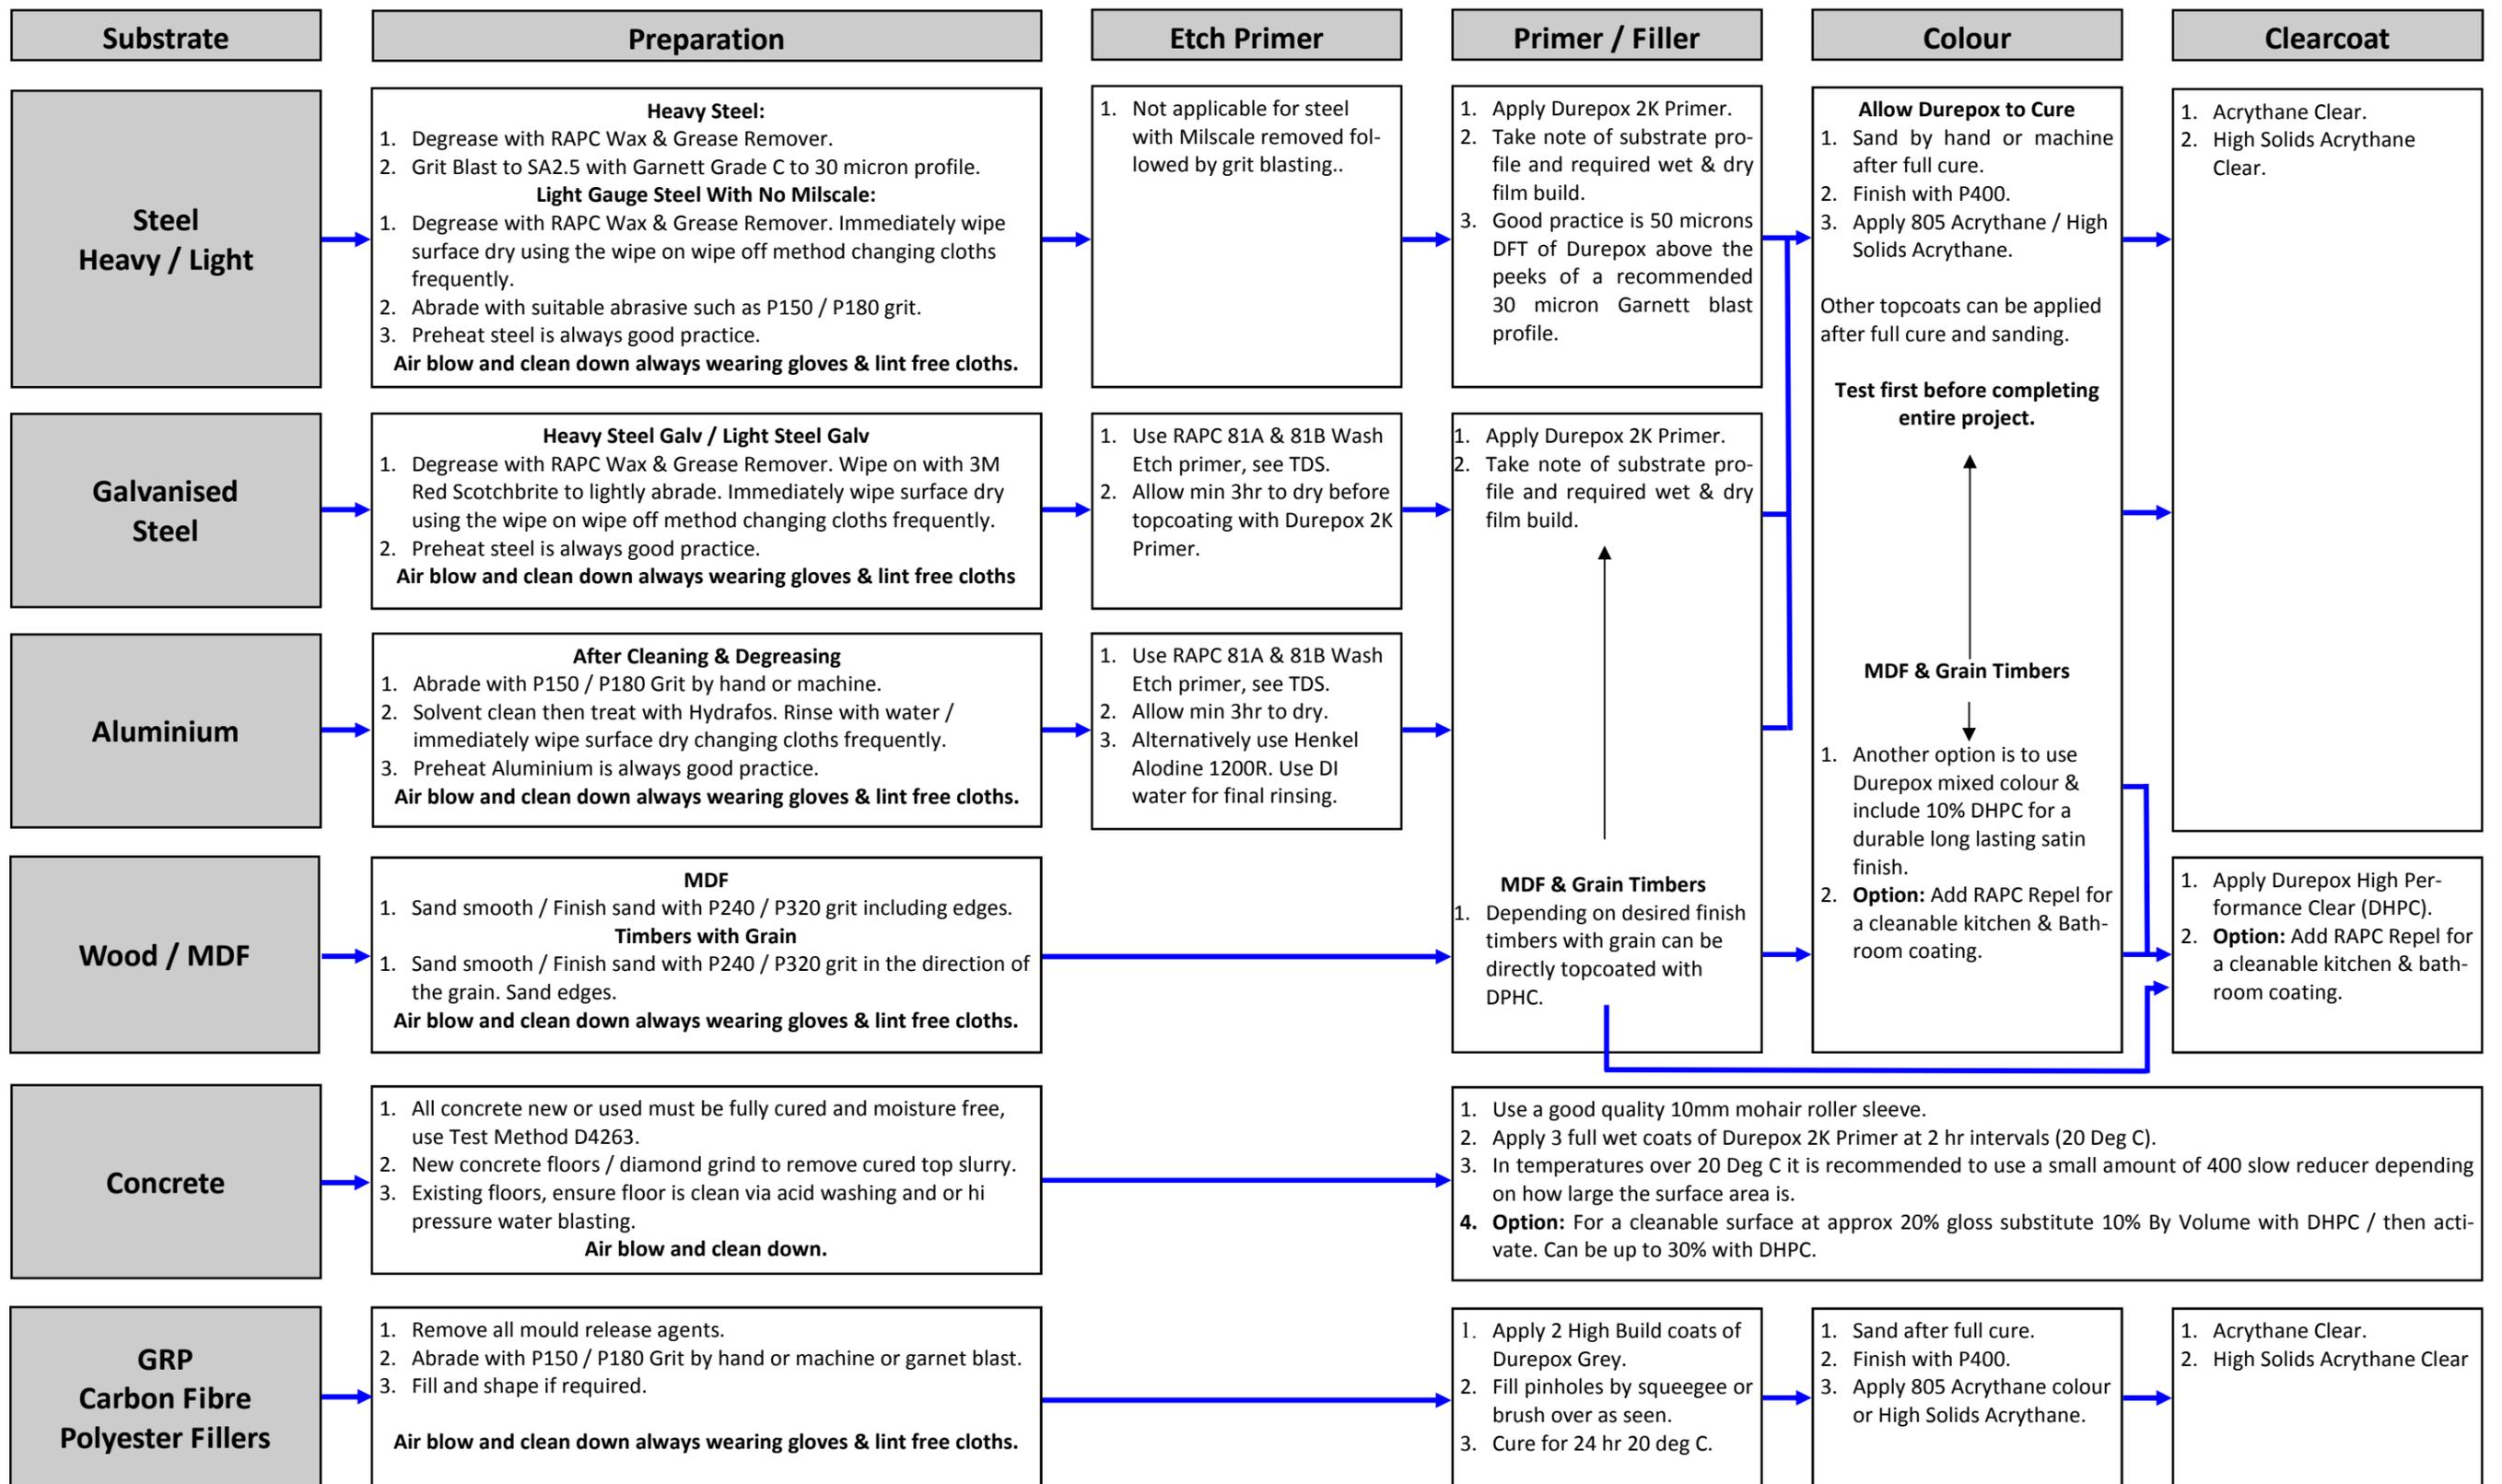

Durepox 2K primer is a very unique 2 pack epoxy Urethane that can be applied by brush, roller, airless, air assisted airless, electrostatic and conventional gravity or pressure pot spray. Durepox has many applications from hi build primers to being used as coloured topcoats in conjunction with Durepox High Performance Clear (DHPC). Other 2K topcoats can be applied over Durepox after full cure and sanding, test an area first before completing entire project.

**Durepox 2K primer is MAF approved – Ref MQ1 Dairy Approval, also Regulatory Authority manual 15 for Meat, Fish, game and poultry, all areas.**

No warranty either expressed or implied is made by Resene Automotive & Performance Coatings in this document, which is a technical flow chart to be used as a helpful guide only. The description of the product and its properties is for the sole purpose of identifying the product and does not constitute a warranty that the product or its properties shall conform to that description, nor is the description of the product or process and its properties a warranty by Resene Automotive & Performance Coatings that the goods are suitable for a particular purpose. If carrying out large repaint in a non controlled environment Do not apply paint if relative humidity is above 85% or temperature is within 3 deg C of Dew Point being the MPT or Minimum Paint Temperature.